









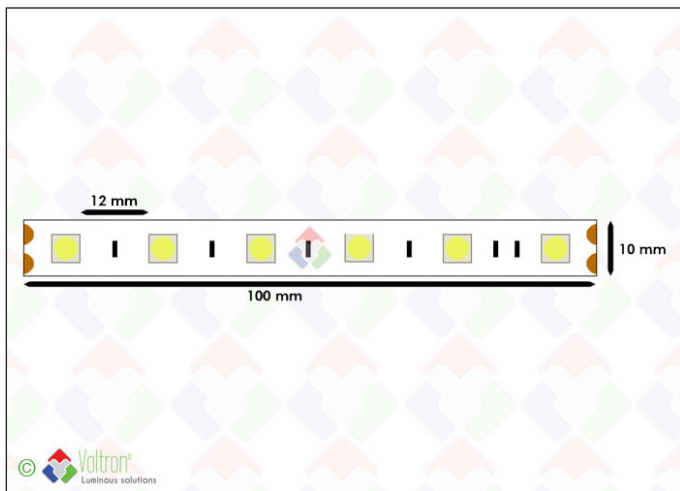

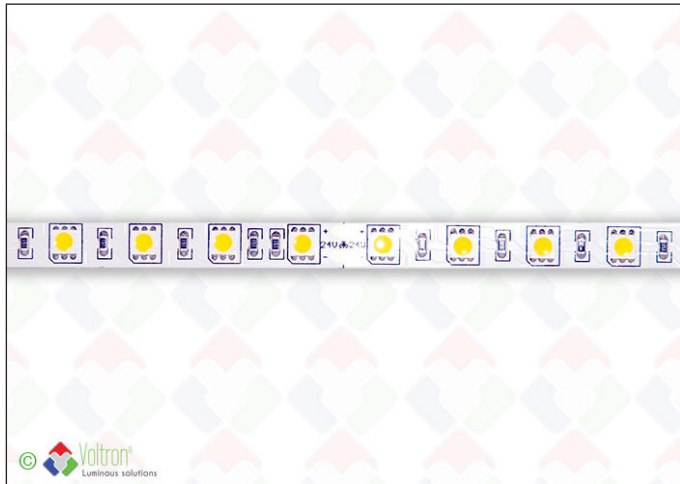





## Led strip : 60 led par meter SMD5050 -PREMIUM VERSION



### PV-5050-60-WW-20-24V

VOLTRON® LED strip for the professional with unique patented waterproof design (no more visible difference in color between IP20 and IP54/68). LED strip is equipped with 3 ounce PCB for extremely durable retention of light efficiency and cooling. MacAdam 3 LED chips guarantee always a consistent color level (BIN and BATCH codes). Packed per roll of 5 meters, provided with 30cm AWG cable on both sides. VOLTRON® 24V dimmable LED strip is mainly used for direct or indirect mood lighting - Premium Version - Epistar LED die - SMD3528 InGaN Blue Chip - 120LEDs/m - 4000K - IP68 - 9,6W/m - 735Lm - Advice = max. up to 10M/power supply (constant voltage) - L80 >40.000h - 3 years warranty - In combination with our single ALU-profiles

 CCT 2700K	 WATT 14,4W/M	 IP 20	 Lumen 1080Lm	 CRI Ra >80	 UGR >19	 MacAdam 3
 LED 60/M	 VOLT 24V	 5M	 V	 120°	 100MM	 GARANTIE 3

## Technical data


Productnumber	Barcode	CCT	IP value	Led chip
PV-5050-60-WW-20-	LH-1337	2700K	20	SMD5050
Number of LED	Wattage	Length	Voltage	Width
60/M	14,4W/M	5M	24V	10MM
CRI Ra	Lxx @Ta=25°C	UGR	MacAdam	Lumen
>80	L80 >40.000	>19	3	1080Lm
Spread angle	Led distance	Dimmable	Cutttable	Cable length
120°	12MM	V	100MM	2X30CM AWG
Constant voltage	Packed per	Full package		
V	1	29		

## Specification text\*

Compact LED light line for flush and surface mounting. Built from 60 'dimmmable' LEDs / m - PREMIUM Version Epistar SMD5050 with a light spread of 120 ° and double white, ultra-reflective PCB for increased light reflection and accelerated heat dissipation. 3 ounces of PCB and LED chips according to 3MacAdam. At the rear with 3M double-sided tape. Standard vacuum packed on a roll of 5 meter in a box. Can be shortened per 10 cm. Equipped with a 30 cm twin AWG cable on both sides. Width 10 mm, thickness 3.5 mm, LED distance 12 mm. Generates 14.4W / m and 1080lm at 24V and a light color 2700K (white). IP20 class. Can be connected to Meanwell power supplies (IP67) with a constant voltage. With a color rendering index of > 85.

\* Available on the website

## Photometric diagram

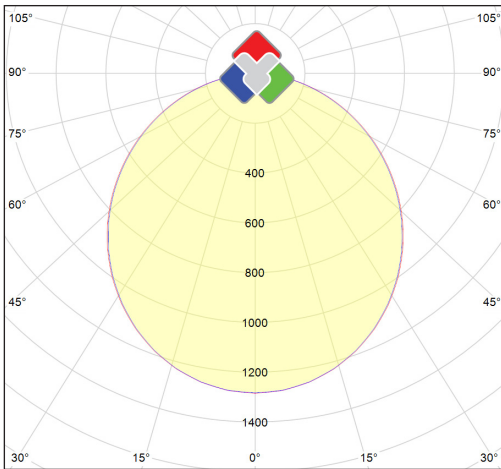

## Areas of application

Shops, showroom / All interior spaces (excluding bathroom and kitchen work surfaces) / Lighting of cabinets, cupboard walls / Display lighting / Indirect lighting for ceilings / Surface mounted above a stretch ceiling / Built into gyproc walls or stone walls using an LED profile / For roof overhangs and bathrooms or other damp rooms always use IP54 / Always process the LED strips in an aluminum profile

## Extra information

All information, specification texts, photos, technical drawings, connection diagrams, photometric .LDT files can be found via this clickable direct link: [https://www.voltron-lighting.com/product/EN/69/1337/Led\\_strip\\_60\\_led\\_par\\_meter\\_SMD5050\\_PREMIUM\\_VERSION\\_PV\\_5050-60-WW-20](https://www.voltron-lighting.com/product/EN/69/1337/Led_strip_60_led_par_meter_SMD5050_PREMIUM_VERSION_PV_5050-60-WW-20)

or can be requested through your contact person.

## Direct link website



## Product barcode



The Voltron® name and logo as well as product names are part of the Voltron® Lighting Group and are protected by national and international laws.

The usage rights, reproduction rights as well as the intellectual rights are the exclusive property of the Voltron® Lighting Group.

Voltron® pays a lot of attention to the correctness and completeness of the information. However, it cannot be held responsible for any inaccuracy and / or omission.

All images and texts are protected under copyright law and may not be used or multiplied without express permission.